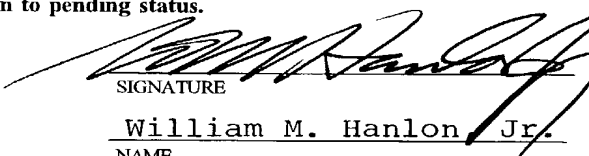


JC02 Rec'd PCT/PTO 01 APR 2002

FORM PTO-1390 (REV. 12-2001)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER DFS-146-A	
<b>TRANSMITTAL LETTER TO THE UNITED STATES          DESIGNATED/ELECTED OFFICE (DO/EO/US)          CONCERNING A FILING UNDER 35 U.S.C. 371</b>				U.S. APPLICATION NO. (If known, see 37 CFR 1.5) <b>10/089561</b>	
INTERNATIONAL APPLICATION NO. 29 September 2000		INTERNATIONAL FILING DATE PCT/EP00/09537		PRIORITY DATE CLAIMED 02 October 1999	
TITLE OF INVENTION COMPOSITE MATERIAL FOR PRODUCING A LAYER OF A HYGENIC ARTICLE THAT COMES INTO PHYSICAL CONTACT WITH THE BODY AND A CORRESPONDING HYGIENIC ARTICLE.					
APPLICANT(S) FOR DO/EO/US <u>Rainer Mangold, Krzysztof-Daniel Malowaniec, Petra Eckel</u>					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below. 4. <input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31). 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) a. <input checked="" type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau). b. <input type="checkbox"/> has been communicated by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). 6. <input checked="" type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)). a. <input checked="" type="checkbox"/> is attached hereto. b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4). 7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau). b. <input type="checkbox"/> have been communicated by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)). 9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). <b>Unsigned Copy</b> 10. <input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).					
<b>Items 11 to 20 below concern document(s) or information included:</b>					
11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 13. <input checked="" type="checkbox"/> A <b>FIRST</b> preliminary amendment. 14. <input type="checkbox"/> A <b>SECOND</b> or <b>SUBSEQUENT</b> preliminary amendment. 15. <input checked="" type="checkbox"/> A substitute specification. 16. <input type="checkbox"/> A change of power of attorney and/or address letter. 17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825. 18. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4). 19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4). 20. <input checked="" type="checkbox"/> Other items or information: <b>Red-Lined Specification</b>					

U.S. APPLICATION NO. (if known, see 37 CFR 1.56) <b>Unknown</b>				INTERNATIONAL APPLICATION NO. PCT/EP00/09537		ATTORNEY'S DOCKET NUMBER DFS-146-A	
<b>21.</b> <input checked="" type="checkbox"/> The following fees are submitted: <b>BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):</b> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO..... \$1040.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO .....\$890.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... \$740.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... \$710.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) ..... \$100.00 <b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>						<b>CALCULATIONS    PTO USE ONLY</b>	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).						\$ 890	890
						\$ 130	130
<b>CLAIMS</b>		<b>NUMBER FILED</b>	<b>NUMBER EXTRA</b>	<b>RATE</b>	\$		
Total claims	19 - 20 =	0	x \$18.00	\$			
Independent claims	3 - 3 =	0	x \$84.00	\$			
<b>MULTIPLE DEPENDENT CLAIM(S)</b> (if applicable)				+ \$280.00	\$		
<b>TOTAL OF ABOVE CALCULATIONS =</b>					\$ 1020	1020	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.						\$ 0	-
<b>SUBTOTAL =</b>					\$ 1020		
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).						\$ 0	
<b>TOTAL NATIONAL FEE =</b>					\$ 1020		
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +						\$ 0	
<b>TOTAL FEES ENCLOSED =</b>					\$ 1020		
						<b>Amount to be refunded:</b>	\$
						<b>charged:</b>	\$
<b>a.</b> <input checked="" type="checkbox"/> A check in the amount of \$ <u>1020.00</u> to cover the above fees is enclosed.							
<b>b.</b> <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.							
<b>c.</b> <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>25-0115</u> . A duplicate copy of this sheet is enclosed.							
<b>d.</b> <input type="checkbox"/> Fees are to be charged to a credit card. <b>WARNING:</b> Information on this form may become public. <b>Credit card information should not be included on this form.</b> Provide credit card information and authorization on PTO-2038.							
<b>NOTE:</b> Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.							
SEND ALL CORRESPONDENCE TO: William M. Hanlon, Jr. YOUNG & BASILE, PC 3001 West Big Beaver Road Suite 624 Troy, MI 48084 248-649-3333							
						 SIGNATURE	
						William M. Hanlon, Jr. NAME	
						<u>28422</u> REGISTRATION NUMBER	

Our Reference: DFS-146-A

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant:	Rainer Mangold, Krzysztof-Daniel Malowaniec & Petra Eckel
Serial Number:	Unknown
Filing Date:	Concurrent
Examiner/Art Group Unit:	Unknown/Unknown
Title:	COMPOSITE MATERIAL FOR PRODUCING A LAYER OF HYGIENE ARTICLE THAT COMES INTO PHYSICAL CONTACT WITH THE BODY AND A CORRESPONDING HYGIENIC ARTICLE

PRELIMINARY AMENDMENT

Assistant Commissioner of Patents  
Washington, D.C. 20231

Sir:

If any charges or fees must be paid in connection with the following communication, they may be paid out of our Deposit Account No. 25-0115.

Prior to initial examination, please amend the above-identified patent application as indicated below.

In the specification:

After the claims, begin a new page and insert:

ABSTRACT

A composite material for producing a layer of a disposable absorbent hygienic article that comes into physical contact with the body, the layer formed of at least two layers of a nonwoven material that are thermally interlinked. The top layer that comes into physical contact with the body is formed of a mixture of mono-component fibers and bi-component fibers. The share of the bi-component fibers is 30 to 70% by weight and the denier value of the fibers of the top layer is not more than 3.5 dtex. The lower layer is formed of at least 40% by weight of bi-component fibers whose higher-melting component is PES (polyester) and the lower-melting component has a melting point lower than that of the mono-component fibers of the

top layer. The denier value of the bi-component fibers of the lower layer ranges between 4 and 10 dtex.

In the claims:

1                   1.       (Amended) A composite material for producing a layer of a  
2       disposable absorbent hygienic article that comes into physical contact with the body,  
3       made of at least two non-woven material layers joined by thermal processing, where  
4       the upper layer for physical contact with the body is formed of a mixture of mono-  
5       component fibers and bi-component fibers and the percentage of bi-component fibers  
6       amounts to 30 - 70 % by weight of the upper layer, and where the denier of the fibers  
7       of the upper layer is at most 3.5 dtex, and where the lower layer includes at least 40  
8       % by weight of bi-component fibers whose higher melting component is made of  
9       PET and whose lower melting component has a lower melting point than that of the  
10      mono-component fibers of the upper layer, and where the denier of the bi-component  
11      fibers of the lower layer is between 4 and 10 dtex.

1                   2.       (Amended) The composite material in accordance with claim 1,  
2       characterized in that the upper layer for physical contact with the body has a textured  
3       pattern created by calendering, where the percentage of the textured surface  
4       comprises 5 to 30 % of the total surface.

1                   3.       (Amended) The composite material in accordance with claim 2,  
2       wherein the percentage of the textured surface comprises 15 to 25 % of the total  
3       surface.

1                   4.       (Amended) The composite material in accordance with claim 1,  
2       wherein the surface weight of the upper layer is about 10 to 30 g/m<sup>2</sup>.

1                   5.       (Amended) The composite material in accordance with claim 4,  
2       wherein the surface weight of the upper layer is about 15 to 20 g/m<sup>2</sup>.

1                   6.       (Amended) The composite material in accordance with claim 1,  
2 wherein the fibers of the upper layer are one of hydrophilic and made supple to be  
3 permanently hydrophilic.

1                   7.       (Amended) The composite material in accordance with claim 1,  
2 wherein the lower layer comprises at least 60 % by weight bi-component fibers  
3 whose higher melting component is made of PET.

1                   8.       (Amended) The composite material in accordance with claim 7,  
2 wherein the lower layer comprises at least 80 % by weight bi-component fibers  
3 whose higher melting component is made of PET.

1                   9.       (Amended) The composite material in accordance with claim 8,  
2 wherein the lower layer consists of 100 % of bi-component fibers whose higher  
3 melting component is made of PET.

1                   10.      (Amended) The composite material in accordance with claim 1,  
2 wherein the bi-component fibers of the lower layer with PET as higher melting  
3 component is a sheath/core fiber.

1                   11.      (Amended) The composite material in accordance with claim  
2 10, wherein the sheath/core fiber has a core positioned eccentrically to the  
3 longitudinal center direction of the fiber.

1                   12.      (Amended) The composite material in accordance with claim  
2 11, wherein the denier of the sheath/core fiber is 5 to 8 dtex.

1                   13.      (Amended) The composite material in accordance with claim  
2 12, wherein the denier of the sheath/core fiber is 6 to 7 dtex.

1                   14.     (Amended) The composite material in accordance with claim 1,  
2     wherein the lower melting component of the bi-component fiber present at least 40 %  
3     by weight in the lower layer is made of polyethylene.

1                   15.     (Amended) An absorbent hygienic article with a fluid-tight  
2     layer not in physical contact with a body during use, a retaining element and a fluid-  
3     permeable layer furnished on a side of the retaining element in physical contact with  
4     the body, wherein the layer furnished on the fluid-permeable side of the retaining  
5     element in physical contact with the body comprises a composite material in  
6     accordance with claim 1.

1                   16.     (Amended) An absorbent hygienic article having a  
2     fluid-tight layer not in physical contact with the body during use, a retaining element  
3     and a fluid-permeable layer provided on the side of the retaining element in physical  
4     contact with the body, where the retaining element comprises one layer of intralinked  
5     cellulose fibers with a fluid retention value which is derived from the quotients of the  
6     mass ( $g_{Fl}$ ) of the fluid absorbed and the dry mass ( $g_{Fiber}$ ) of the cellulose fibers and is  
7     between 0.6 and 0.9  $g_{Fl}/g_{Fiber}$ , wherein the layer of intralinked cellulose fibers contains  
8     8 - 15 % by weight of superabsorbent polymer materials, where the fluid-permeable  
9     layer provided on the side of the retaining element in physical contact with the body  
10    is at least double-layered and an upper of the double layers consists of fibers with a  
11    denier of at most 3.5 dtex, while a lower of the double layers comprises bi-  
12    component fibers with a denier between 4 and 10 dtex whose higher melting  
13    component is made of PET.

1                   17.     (Amended) The absorbent hygienic article in accordance with  
2     claim 16, wherein the retaining element has in addition a layer of non-meshed  
3     cellulose fibers with a fluid retention value which is made up of the quotients of the  
4     mass ( $g_{Fl}$ ) of the fluid absorbed and the dry mass ( $g_{Fiber}$ ) of the cellulose fibers and is  
5     between 1.0 and 1.4  $g_{Fl}/g_{Fiber}$  and at least 20 % by weight of superabsorbent polymer  
6     materials.

-5-

1                   18.     (Amended) The absorbent hygienic article in accordance with  
2     claim 17, wherein the additional layer of the retaining element is disposed under the  
3     layer of intrameshed cellulose fibers.

1                   19.     (Amended) The absorbent hygienic article in accordance with  
2     claim 18, wherein the additional layer has a layer-like area on the side not in physical  
3     contact with the body in use which is free of superabsorbent materials.

Cancel claim 20.

REMARKS


After entry of this amendment, claims 1-19 have been amended.  
Claim 20 has been cancelled.

A hand-written, corrected copy of the specification is enclosed showing the changes which have been made to the specification as required by Section 608.01(Q) and 714.20(1) of the Manual of Patent Examining Procedure. The Substitute Specification filed herewith has been amended to utilize idiomatic English, correct minor typographical and grammatical errors and to conform the application to current United States patent practice. The Substitute Specification includes no new subject matter; but does include the same changes handwritten in red in the attached, corrected, original specification. Entry of the Substitute Specification is respectfully requested.

It is submitted that this Amendment has antecedent basis in the application as originally filed, including the specification, claims and drawings, and that this Amendment does not add any new subject matter to the application. Consideration of the application as amended is requested.

Respectfully submitted,

YOUNG, BASILE, HANLON, MacFARLANE, WOOD  
& HELMHOLDT, P.C.

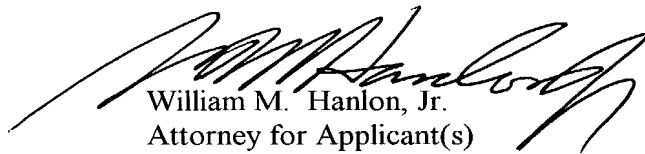

William M. Hanlon, Jr.  
Attorney for Applicant(s)  
Registration No. 28422  
(248) 649-3333

3001 West Big Beaver Rd., Suite 624  
Troy, Michigan 48084-3107

Dated: April 1, 2002  
WMH/jao



**VERSION WITH MARKINGS TO SHOW CHANGES MADE**

**In the claims:**

1. (Amended) [Composite] A composite material for producing a layer of a disposable absorbent hygienic article that comes into physical contact with the body, made of at least two non-woven material layers [(4, 6)] joined by thermal processing, where the upper layer [(4)] [in] for physical contact with the body is formed of a mixture of mono-component fibers and bi-component fibers and the percentage of bi-component fibers amounts to 30 - 70 % by weight of the upper layer, and where the denier of the fibers of the upper layer is at most 3.5 dtex [at the most], and where the lower layer [(6) comprises] includes at least 40 % by weight of bi-component fibers whose higher melting component is made of PET [(polyester)] and whose lower melting component has a lower melting point than that of the mono-component fibers of the upper layer, and where the denier of the bi-component fibers of the lower layer is between 4 and 10 dtex.
2. (Amended) [Composite] The composite material in accordance with claim 1, characterized in that the upper layer [in] for physical contact with the body [(4)] has a textured pattern created by calendering, where the percentage of the textured surface comprises 5 to 30 % of the total surface.
3. (Amended) [Composite] The composite material in accordance with claim 2, wherein the percentage of the textured surface comprises 15 to 25 % of the total surface.
4. (Amended) [Composite] The composite material in accordance with [one of the preceding claims] claim 1, wherein the surface weight of the upper layer [(4) comes to] is about 10 to 30 g/m<sup>2</sup>.

5. (Amended) [Composite] The composite material in accordance with claim 4, wherein the surface weight of the upper layer [(4) comes to] is about 15 to 20 g/m<sup>2</sup>.

6. (Amended) [Composite] The composite material in accordance with [one of the preceding claims] claim 1, wherein the fibers of the upper layer [(4)] are one of hydrophilic [or] and [are] made up to be permanently hydrophilic.

7. (Amended) [Composite] The composite material in accordance with [one of the preceding claims] claim 1, wherein the lower layer [(6)] comprises at least 60 % by weight bi-component fibers whose higher melting component is made of PET [(polyester)].

8. (Amended) [Composite] The composite material in accordance with claim 7, wherein the lower layer [(6)] comprises at least 80 % by weight bi-component fibers whose higher melting component is made of [(PET)] [polyester] PET.

9. (Amended) [Composite] The composite material in accordance with claim 8, wherein the lower layer [(6)] consists of 100 % of bi-component fibers whose higher melting component is made of PET [(polyester)].

10. (Amended) [Composite] The composite material in accordance with [one of the preceding claims] claim 1, wherein the bi-component fibers of the lower layer [(6)] with PET [(polyester)] as higher melting component is a sheath/core fiber.

11. (Amended) [Composite] The composite material in accordance with claim 10, wherein the sheath/core fiber has a core positioned eccentrically to the longitudinal center direction of the fiber.

12. (Amended) [Composite] The composite material in accordance with claim 11, wherein the denier of the sheath/core fiber is 5 to 8 dtex.

13. (Amended) [Composite] The composite material in accordance with claim 12, wherein the denier of the sheath/core fiber is 6 to 7 dtex.

14. (Amended) [Composite] The composite material in accordance with [one of the preceding claims] claim 1, wherein the lower melting component of the bi-component fiber present at least 40 % by weight in the lower layer is made of [PE (] polyethylene [)]].

15. (Amended) [Absorbent] An absorbent hygienic article with a fluid-tight layer [(12)] not in physical contact with [the] a body during use, a retaining element [(14)] and a fluid-permeable layer [(16)] furnished on [the] a side of the retaining element [(14)] in physical contact with the body, wherein the layer [(16)] furnished on the fluid-permeable side of the retaining element [(14)] in physical contact with the body comprises a composite material in accordance with [one or more of the preceding claims or is made of such a composite material] claim 1.

16. (Amended) [Absorbent] An absorbent hygienic article having a fluid-tight layer [(12)] not in physical contact with the body during use, a retaining element [(14)] and a fluid-permeable layer [(16)] provided on the side of the retaining element in physical contact with the body, where the retaining element [(14)] comprises one layer [(24)] of intralinked cellulose fibers with a fluid retention value which is derived from the quotients of the mass ( $g_{FI}$ ) of the fluid absorbed and the dry mass ( $g_{Fiber}$ ) of the cellulose fibers and is between 0.6 and 0.9  $g_{FI}/g_{Fiber}$ , wherein the layer [(24)] of intralinked cellulose fibers contains 8 - 15 % by weight of superabsorbent polymer materials, where the fluid-permeable layer [(16)] provided on the side of the retaining element [(14)] in physical contact with the body [for its part] is at least double-layered and [the] an upper of [these] the double layers consists

of fibers with a [maximum] denier of at most 3.5 dtex, while [the] a lower of [these] the double layers comprises bi-component fibers with a denier between 4 and 10 dtex whose higher melting component is made of PET.

17. (Amended) [Hygienic] The absorbent hygienic article in accordance with claim 16, wherein the retaining element [(14)] has in addition a layer [(26)] of non-meshed cellulose fibers with a fluid retention value which is made up of the quotients of the mass ( $g_F$ ) of the fluid absorbed and the dry mass ( $g_{Fiber}$ ) of the cellulose fibers and is between 1.0 and 1.4  $g_F/g_{Fiber}$  and at least 20 % by weight of superabsorbent polymer materials.

18. (Amended) [Hygienic] The absorbent hygienic article in accordance with claim 17, wherein the additional layer [(26)] of the retaining element is disposed [below] under the layer [(24)] of [intralinked] intrameshed cellulose fibers.

19. (Amended) [Hygienic] The absorbent hygienic article in accordance with claim 18, wherein the additional layer [(26)] has a layer-like area [(28) free of superabsorbent materials] on the side not in physical contact with the body in use which is free of superabsorbent materials.

Cancel claim 20.

*all capital  
and centered* [Title:] Composite Material for Producing a Layer of a Hygienic Article That Comes  
into Physical Contact with The Body and a Corresponding Hygienic Article

BACKGROUND  
[Description]

The invention relates to a composite material for producing a layer of a disposable hygiene article that comes into physical contact with the body from at least two non-woven material layers joined by a thermal process.

Multiple-layer composite materials of this type, as well as hygienic articles with a layer consisting of such a composite material that comes into physical contact with the body, usually described as the top sheet, are known. The layer coming into physical contact with the body usually covers a retaining element located under it, which thus does not come into physical contact with the body, in which the bodily fluid discharged by the user is to be retained, which in the case of modern hygienic articles is primarily achieved by means of superabsorbent materials inside the retaining element.

Severe demands are made on composite materials of the type under discussion with respect to rapid fluid absorption capability even with repeated sudden saturation. Impinging fluid must be prevented from collecting on the surface (pooling) and escaping towards the sides, instead the impinging fluid should be absorbed by the layer coming into physical contact with the body and channeled in the direction of the retaining element. A distribution effect within the layer is also desirable. Furthermore, reverse wetting of the composite material, specifically with the exertion of pressure such as can be caused by the body weight of a user when sitting, should be as low as possible. The composite material should perform a bracing function between the absorbent retaining element of a hygiene article and the skin surface.

The surface which is in physical contact with the skin of the user should be experienced as soft and pleasant, which can be achieved by the use of extremely fine fibers. The use of extremely fine fibers on the other hand conflicts with the attempt to achieve the greatest possible resilience in the characteristics of the composite material. This is understood to mean the ability of the composite material

to bring a high springback force to bear against external compressive forces or at least to resume almost its original condition following saturation and/or compression.

US 5,257,982 describes a composite material for producing a layer that comes into physical contact with the body in an absorptive hygiene article which is formed from at least two non-woven material layers, where each non-woven material layer has a primary layer which comes into physical contact with the body and a second layer positioned under it, which therefore does not come into physical contact with the body. The fiber thickness of the second layer positioned not to come into physical contact with the body is less than the fiber thickness of the first layer positioned so that it comes into physical contact with the body. The publication teaches positioning layers of greater fiber thickness in physical contact with the body and layers of lesser thickness not in physical contact with the body. In the case of several layers, <sup>the layers</sup> they are arranged in order of progressively decreasing fiber thickness. The layers can comprise thermoplastic fibers of polyamides, polyolefins or polypropylenes, fibers of low-melting polyester are also mentioned.

EP 0 372 572 A2 describes polyester binding fibers for thermally bonding non-woven fiber materials which have a relatively low melting point in the range between 160° and 220° Celsius. [Additional recommendations cannot be derived from this publication]

From EP-A-0 859 883 B1 a plurality of composite materials is known with at least two layers of non-woven material, which can also be used to produce a layer for a hygienic article that comes into physical contact with the body. This publication is concerned with improving the fluid absorption and distribution characteristics of the composite material as the top sheet in a hygienic article, specifically transfer times and reverse wetting characteristics are to be improved. Two- or three-layer composite materials in highly varied combinations of layers are disclosed, as part of which mixtures of synthetic bonding fibers and matrix-forming fibers are utilized.

#### SUMMARY

The object of the present invention is to further improve a composite material of the type <sup>described above</sup> named at the beginning, taking into consideration the previously <sup>described</sup> named general requirements for a top sheet material, with respect to the strength of

the fiber composite, namely <sup>^</sup>between the fibers of a non-woven layer but also between at least two non-woven layers, and with respect to the tendency of the composite material to give off particulates (fibers or parts of fibers) into the environment when it is handled (powdering). It was ascertained that composite materials on a non-woven base create very high levels of dust when they are handled and especially when handled in high-speed manufacturing and processing machinery, e.g. <sup>^</sup>those for the production of absorbent hygienic articles. The present invention is intended to counteract this additional problem and thereby improve the processing properties of composite materials from non-woven layers. Furthermore, any migration to the outside of the frequently granular superabsorbent polymer materials from the retaining element through the layer coming into physical contact with the body is to be prevented.

This object is accomplished by a composite material of at least two non-woven layers joined by a thermal process, wherein the upper layer in physical contact with the body is formed from a mixture of mono-component fibers and bi-component fibers and the proportion of bi-component fibers amounts to 30 to 70 % by weight of the upper layer, and where the denier of the fibers in the upper layer is at most 3.5 dtex, and where the lower layer comprises at least 40 % by weight bi-component fibers, whose higher melting component is made of PET (polyester) and whose lower melting component has a lower melting point than that of the mono-component fibers of the upper layer, and where the denier of the bi-component fibers of the lower layer is between 4 and 10 dtex.

The bi-component fibers, whose lower melting component forms a binding agent through a thermal process, result in an improvement in internal strength, i.e. <sup>^</sup>the cohesion of the fibers one to the other but also of the fibers between the layers. As the result of incorporating higher melting, extremely fine, <sup>and</sup> therefore <sup>^</sup>extremely thin mono-component fibers in the upper layer in physical contact with the body, in addition to bi-component fibers, the upper layer is felt to be soft and pleasant. A percentage of from 30 to 70 % by weight for the bi-component fibers has proven to be conducive to reaching the objective. If too few fine mono-component fibers are used in the upper layer which remain untouched by the thermal process, the

being

4

layer would be experienced as too hard. If too few bi-component fibers are used which result in the fibers being linked through the thermal process, the bond within the layer is inadequate. By selecting the denier of the fibers in the upper layer at a maximum of 3.5 dtex, not only the aspect of a pleasant sensation when worn is satisfied, but an additional problem is solved very effectively. Migration of granular superabsorbent particulate material to the surface of the hygienic article is hereby prevented. Consequently, additional protective layers in the form of thin paper-like layers or the like for the retaining element containing superabsorbent materials can be dispensed with.

With the invention it was recognized that the dust problem mentioned above has its basis in conflicting goals. In the fiber composite the one minimum lower layer is primarily supposed to provide adequate capacitative volume to ensure rapid absorption of fluid and to function as a spacer between the (wet) retentive absorptive element and the inside of the diaper. This is achieved on the one hand by the use of relatively stiff, resilient fibers, <sup>and</sup> on the other hand <sup>by</sup> the fact that the lower layer undergoes no or only very minor compression during the thermal bonding. The result of these circumstances is that during the thermal bonding relatively few fibers come into contact with each other. The dust problem results from this during the further processing of the composite material. Inadequately bonded fibers and fiber parts have a tendency to detach themselves from the fiber composite.

By selecting a special bi-component fiber with PET (polyester) (or with a polymer equivalent to PET with respect to the resiliency characteristics of such bi-component fibers) as a higher-melting component in a proportion of at least 40% with a simultaneous selection of a fiber thickness between 4 and 10 dtex, both adequate rigidity or resiliency of the composite material as well as outstanding bonding of the fibers to each other is achieved.

The PET core of these bi-component fibers provides adequate fiber stiffness and consequently the necessary resiliency and maintenance of a large capacitative volume. If too few bi-component fibers with PET (polyester) as higher melting component are used, the lower layer either has too little resiliency (in the event that another bi-component fiber is used, for example, PP/PE (polypropylene,



polyethylene) bi-component fibers), or the fibers in the lower layer are not adequately bonded to each other following thermofusion (in the event that a resilient mono-component fiber is used as an additional fiber component). The latter configuration would promote the dust problem described above during further processing of the composite material.

EP-A-0 859 883 B1 mentioned <sup>above,</sup> [at the beginning] does mention a plurality of combinations for the individual layers of the non-woven composite material. Only a few embodiments include bi-component fibers with PET (polyester) as the higher melting component. The combinations of layers however diverge in many other parameters from the combination claimed here. The advantageousness of bi-component fibers of this type in the combination of layers claimed was neither recognized nor suggested.

In an advantageous further development of the invention the upper layer in physical contact with the body has an textured pattern created by calendering, where the percentage of the textured pattern covers 5 to 30 %, preferably 15 to 25 % of the total area of the composite material. Calendering further increases the strength within the composite material. Impermeability with respect to an involuntary escape of superabsorbent particulate materials, which must therefore be prevented, is also improved.

It has furthermore proved to be advantageous if the upper layer is configured with a surface weight of 10 to 30, preferably of 15 to 20 g/m<sup>2</sup>. The rate of fluid absorption is adequate with this surface weight and the layer can still be produced economically.

The rate of fluid absorption is positively influenced even more by making the fibers of the upper layer hydrophilic.

In a further development of the invention the lower layer comprises at least 60 % by weight, preferably at least 80 % by weight, bi-component fibers, whose higher melting component is composed of PET (polyester). In an especially preferable form, the lower layer consists 100 % of such bi-component fibers. The higher the percentage of these bi-component fibers as selected under the invention in the lower layer of the non-woven composite material, the more resilient the

composite material proves to be, while at the same time exhibiting a higher potential for inter-fiber bonding.

Bi-component fibers can be produced in a known way as side-by-side fiber, as sheath/core, or also as matrix fibers with an inlaid filament-like lower melting component. The bi-component fibers with PET (polyester) as higher melting component is preferably configured as a sheath/core fiber with a core located eccentrically to the longitudinal central direction of the fiber. The thickness of the sheath/core bi-component fibers in a further development of the invention is 5 to 8 dtex and in accordance with a particularly preferred embodiment 6 to 7 dtex.

In accordance with a further advantageous embodiment of the invention, the lower melting component of the bi-component fiber present at least 40 percent by weight in the lower layer is formed of PE (polyethylene). The specific combination of PET as higher melting component and PE as lower melting component has proven to be advantageous, since in such a case the weldability with other components of absorbent hygienic articles, for example the back sheet normally made of PP or PE, is made easier.

The further object of the present invention is to improve a hygienic article having a fluid-tight layer not in physical contact with the body in use, a retaining element and a fluid-permeable layer provided on the side of the retaining element in physical contact with the body, both with respect to fluid absorption and distribution properties and low reverse wetting characteristics as well with respect to the dust problem mentioned <sup>above</sup> at the beginning and also the barrier effect of the layer not in physical contact with the body to prevent superabsorbent particulate materials from escaping to the surface of the hygienic article.

This object is accomplished by a hygienic article, wherein the retaining element comprises a layer of intralinked cellulose fibers with a fluid retention value between 0.6 and 0.9  $\text{g}_{\text{FI}}/\text{g}_{\text{Fiber}}$ , where the layer of intralinked cellulose fibers contains 8 - 15 % by weight of superabsorbent polymer materials, where the fluid-permeable layer provided on the side of the retaining element in physical contact with the body for its part is at least two layers and the upper of these layers consists of fibers with a denier of at most 3.5 dtex, while the lower of these layers

comprises bi-component fibers with a denier between 4 and 10 dtex, whose higher melting component is made of PET.

The fluid retention capability of the linked and non-linked natural cellulose fibers is determined by the following centrifuge test giving the previously mentioned fluid retention value. A layer of cellulose fibers to be analyzed is weighed in a dry state to determine its mass in grams. The samples are then immersed completely for 30 minutes in a one-percent sodium chloride solution of demineralized water as the test solution and then centrifuged for 4 minutes at 276 times the speed of gravitational acceleration. Then the specimens are weighed again to determine the mass, including the bound fluid. The mass of the fluid absorbed or bound is found from the difference between the mass determined after centrifuging and the dry mass of the fiber material to be analyzed. If this difference is divided by the dry mass a retention value is obtained in  $g_F/g_{Fiber}$ .

As the result of the retaining element having a layer of intralinked cellulose fibers with 8 to 15 % by weight of this layer comprising superabsorbent polymer materials, one effect is to prevent the retaining element from collapsing when impacted by fluid, since intralinked cellulose fibers expand when impacted by fluid rather than collapsing in on themselves, which is generally known and utilized in modern hygienic articles. The second effect is that fluid remaining in the retaining element is bound there as the result of the inventive high percentage of superabsorbent polymer materials in this layer of the retaining element preferably in physical contact with the body. The reverse wetting characteristics of the retaining element and consequently of the hygienic article are markedly improved, since even under exertion of pressure, such as the body weight of a user of the hygienic article, any still remaining fluid still present in this layer cannot reach the user's skin surface since it is adequately bonded by the superabsorbent materials in this layer.

By further developing the fluid-permeable layer, provided as at least two layers on the side of the retaining element in physical contact with the body, that is the top sheet of the hygienic article, so that the upper of these layers consists of fibers with a denier of 3.5 dtex at most, while the lower of these layers comprises bi-component fibers with a denier between 4 and 10 dtex, whose higher melting

component is formed of PET (polyester), one effect - as discussed at the beginning in connection with the composite material under the invention - is to convey a pleasant feeling during use because of the extremely fine fibers in the layer in physical contact with the skin, and the other effect is that good fiber cohesion is achieved, with good resiliency characteristics in the lower layer and absolute impermeability to the escape of superabsorbent particulate materials.

In this <sup>aspect</sup> embodiment of the invention the retaining element has in addition a layer of non-linked cellulose fibers with a fluid retention value between 1.0 and 1.4  $\text{g}_{\text{F}}/\text{g}_{\text{Fiber}}$  and at least 20 % by weight, preferably at least 40 % by weight superabsorbent polymer materials. This layer is located below the layer of the retaining element formed from intralinked cellulose fibers, thus not in physical contact with the body.

Furthermore it has proven to be advantageous if the previously mentioned additional layer of the retaining element is constructed in two layers, by <sup>the additional</sup> said layer having a layer essentially free of superabsorbent materials on the side not in physical contact with the body in use. This essentially SAP-free layer, which has at most 20 % by weight, preferably at most 10 % by weight of superabsorbent materials, functions almost as a blocker for granular superabsorbent particulate materials which are contained in very much higher concentration in the aforementioned retaining layer of the retaining element, towards the side not in physical contact with the body, where there is a risk that these occasionally sharp granules can damage the fluid-impermeable layer not in physical contact with the body (the back sheet).

#### BRIEF DESCRIPTION OF THE DRAWING

Additional features, details and advantages of the invention can be found in the attached patent claims and the drawing and following description of preferred embodiments of the invention.

In the drawing:

Figure 1 shows a schematic cross-section view of a dual-layer composite material under the invention;

Figure 1a shows a textured pattern from the composite material; <sup>and</sup>

Figure 2 shows a schematic cross-section view of a hygienic article under the invention.

### DETAILED DESCRIPTION

Figure 1 shows in a schematic representation a composite material under the invention which can be used as a layer in physical contact with the body in a hygienic article. The composite material 2 comprises a first upper layer 4 of the hygienic article in physical contact with the body in use and a second lower layer 6 of the hygienic article not in physical contact with the body in use. The upper layer 4, which has a surface weight of  $18 \text{ g/m}^2$ , is formed of a carded non-woven material from a fiber mixture which is composed 60 % by weight of polypropylene mono-component fibers with a denier of 2.2 dtex and 40 % by weight of polypropylene/polyethylene bi-component fibers with a denier of 1.7 dtex. This layer was calendered, during which process a so-called "checkerboard textured pattern" was created, which has line sections 8 alternately offset to each other and aligned to each other in vertical directions. as shown in Figure 1a The percentage of textured line sections 8 over the entire surface is about 20 percent.

The melting point of the PP mono-component fibers at about  $160^\circ\text{C}$  is higher than that of the lower melting component PE of the PP/PE bi-component fibers at  $110^\circ\text{C}$ . The melting point of the higher melting PP component of the PP/PE bi-component fibers is about  $140^\circ\text{C}$ .

The lower layer 6, which has a surface weight of  $12 \text{ g/m}^2$ , comprises a high percentage of PET/PE bi-component fibers, which percentage was selected in the case of the preferred embodiment at 100 %. The bi-component fibers have a fineness or thickness of 4.4 dtex. The melting point of the higher melting component PET (polyester) of the PET/PE bi-component fibers lies at about  $260^\circ\text{C}$ . The bi-component fiber is configured as sheath/core fiber with core of PET symmetrical to the longitudinal center direction of the fiber.

A bi-component fiber with a thickness of 6.7 dtex proves to be particularly suitable, preferably formed as sheath/core fiber with asymmetrical core (higher resiliency).

The lower layer 6 was configured as carded non-woven material. The previously calendered upper layer 4 and the lower layer 6 are positioned on top of

one another and bonded together in an "air through process" by the thermal effect of hot air, in which the lower melting component of the bi-component fibers (PE in each case) is at least softened by the thermal effect and thus bonds the fibers of the individual layers to each other, but also bonds the fibers in an interface boundary area between the two non-woven material layers.

Figure 2 shows in a schematic view a preferred embodiment of a hygienic article 10 <sup>of</sup> under the invention with fluid-impermeable plastic layer 12 not in physical contact with the body, a triple-layer absorbent element 14 and a top sheet layer 16, which for its part is configured at least double-layered, covering the absorptive element on the side in physical contact with the body. In addition, the hygienic article includes on both sides of the absorptive element rib elements 20 furnished with means of elastification 18, which overlap the top sheet <sup>16</sup> towards the sides visible in the drawing and run flush to the edge as far as a longitudinal edge 22 of the plastic layer 12.

The retaining element 14 comprises a layer 24 furnished immediately below the top sheet layer 16 and in contact with it, which consists of linked cellulose fibers with a percentage of from 8 to 15 % by weight with respect to the weight of this layer of superabsorbent materials. Below this first layer 24 is a second retaining element layer 26, which essentially consists of non-linked cellulose fibers with a percentage of more than 20 % by weight of superabsorbent materials. A third layer 28 not in physical contact with the body, which can also be a partial layer of the second layer 26 and which likewise consists of natural non-linked cellulose fibers, but which has no superabsorbent materials, follows this layer 26. This partial layer acts primarily as a barrier layer for granular superabsorbent particulate materials and prevents them from dropping further down towards the plastic layer 12 and damaging it.

The top sheet layer 16 in physical contact with the body is, as already mentioned, configured in two layers, where the upper layer coming into direct physical contact with the body of a user of the hygienic article consists of fibers with a maximum denier of 3.5 dtex, while the lower of these layers includes bi-component fibers with a denier between 4 and 10 dtex, whose higher melting component is made

of PET (polyester). This top sheet layer 16 is preferably configured like the composite material from Figure 1.

What is claimed is:

[What Is Claimed Is:]

1. Composite material for producing a layer of a disposable absorbent hygienic article that comes into physical contact with the body, made of at least two non-woven material layers (4, 6) joined by thermal processing, where the upper layer (4) in physical contact with the body is formed of a mixture of mono-component fibers and bi-component fibers and the percentage of bi-component fibers amounts to 30 - 70 % by weight of the upper layer, and where the denier of the fibers of the upper layer is 3.5 dtex at the most, and where the lower layer (6) comprises at least 40 % by weight bi-component fibers whose higher melting component is made of PET (polyester) and whose lower melting component has a lower melting point than that of the mono-component fibers of the upper layer, and where the denier of the bi-component fibers of the lower layer is between 4 and 10 dtex.

2. Composite material in accordance with claim 1, characterized in that the upper layer in physical contact with the body (4) has a textured pattern created by calendering, where the percentage of the textured surface comprises 5 to 30 % of the total surface.

3. Composite material in accordance with claim 2, wherein the percentage of the textured surface comprises 15 to 25 % of the total surface.

4. Composite material in accordance with one of the preceding claims, wherein the surface weight of the upper layer (4) comes to 10 to 30 g/m<sup>2</sup>.

5. Composite material in accordance with claim 4, wherein the surface weight of the upper layer (4) comes to 15 to 20 g/m<sup>2</sup>.

6. Composite material in accordance with one of the preceding claims, wherein the fibers of the upper layer (4) are hydrophilic or are made supple to be permanently hydrophilic.



7. Composite material in accordance with one of the preceding claims, wherein the lower layer (6) comprises at least 60 % by weight bi-component fibers whose higher melting component is made of PET (polyester).

8. Composite material in accordance with claim 7, wherein the lower layer (6) comprises at least 80 % by weight bi-component fibers whose higher melting component is made of (PET) polyester.

9. Composite material in accordance with claim 8, wherein the lower layer (6) consists 100 % of bi-component fibers whose higher melting component is made of PET (polyester).

10. Composite material in accordance with one of the preceding claims, wherein the bi-component fibers of the lower layer (6) with PET (polyester) as higher melting component is a sheath/core fiber.

11. Composite material in accordance with claim 10, wherein the sheath/core fiber has a core positioned eccentrically to the longitudinal center direction of the fiber.

12. Composite material in accordance with claim 11, wherein the denier of the sheath/core fiber is 5 to 8 dtex.

13. Composite material in accordance with claim 12, wherein the denier of the sheath/core fiber is 6 to 7 dtex.

14. Composite material in accordance with one of the preceding claims, wherein the lower melting component of the bi-component fiber present at least 40 % by weight in the lower layer is made of PE (polyethylene).

15. Absorbent hygienic article with a fluid-tight layer (12) not in physical contact with the body during use, a retaining element (14) and a fluid-permeable layer (16) furnished on the side of the retaining element (14) in physical contact with the body, wherein the layer (16) furnished on the fluid-permeable side of the retaining element (14) in physical contact with the body comprises a composite material in accordance with one or more of the preceding claims or is made of such a composite material.

16. Absorbent hygienic article having a fluid-tight layer (12) not in physical contact with the body during use, a retaining element (14) and a fluid-permeable layer (16) provided on the side of the retaining element in physical contact with the body, where the retaining element (14) comprises one layer (24) of intralinked cellulose fibers with a fluid retention value between 0.6 and 0.9  $\frac{g_{Fl}}{g_{Fiber}}$ , wherein the layer (24) of intralinked cellulose fibers contains 8 - 15 % by weight of superabsorbent polymer materials, where the fluid-permeable layer (16) provided on the side of the retaining element (14) in physical contact with the body for its part is at least double-layered and the upper of these layers consists of fibers with a maximum denier of 3.5 dtex, while the lower of these layers comprises bi-component fibers with a denier between 4 and 10 dtex whose higher melting component is made of PET.

17. Hygienic article in accordance with claim 16, wherein the retaining element (14) has in addition a layer (26) of non-meshed cellulose fibers with a fluid retention value between 1.0 and 1.4  $\frac{g_{Fl}}{g_{Fiber}}$  and at least 20 % by weight of superabsorbent polymer materials.

18. Hygienic article in accordance with claim 17, wherein the additional layer (26) of the retaining element is disposed below the layer (24) of intralinked cellulose fibers.

20. Hygienic article in accordance with one of the claims 16 to 19, wherein the fluid-permeable layer (16) furnished on the side of the retaining element in contact with the body is configured in accordance with one or more of the claims 1 to 14.

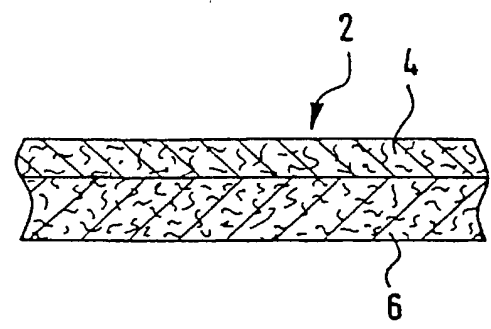


Fig. 1




Fig. 1a

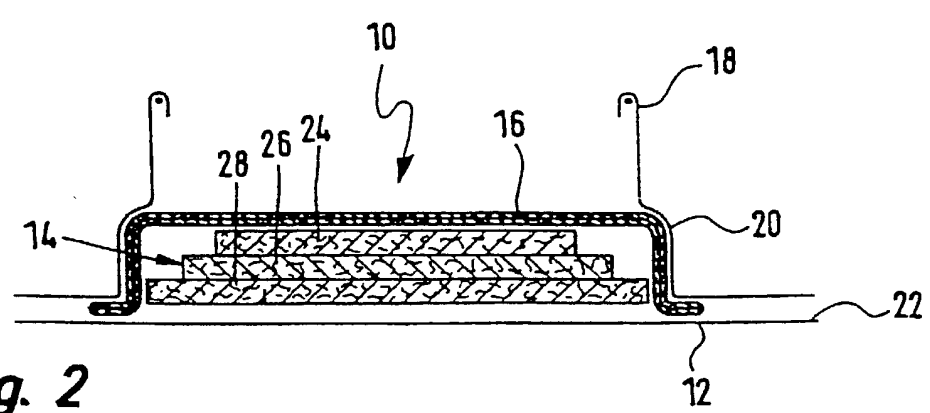


Fig. 2

1/p r t d

1

## SUBSTITUTE SPECIFICATION

Our Reference: DFS-146-A

PATENT

**COMPOSITE MATERIAL FOR PRODUCING A LAYER OF HYGIENIC  
ARTICLE THAT COMES INTO PHYSICAL CONTACT WITH THE BODY  
AND A CORRESPONDING HYGIENIC ARTICLE**

BACKGROUND

- [0001] The invention relates to a composite material for producing a layer of a disposable hygiene article that comes into physical contact with the body from at least two non-woven material layers joined by a thermal process.
- [0002] Multiple-layer composite materials of this type, as well as hygienic articles with a layer consisting of such a composite material that comes into physical contact with the body, usually described as the top sheet, are known. The layer coming into physical contact with the body usually covers a retaining element located under it, which thus does not come into physical contact with the body, in which the bodily fluid discharged by the user is to be retained, which in the case of modern hygienic articles is primarily achieved by means of superabsorbent materials inside the retaining element.
- [0003] Severe demands are made on composite materials of the type under discussion with respect to rapid fluid absorption capability even with repeated sudden saturation. Impinging fluid must be prevented from collecting on the surface (pooling) and escaping towards the sides, instead the impinging fluid should be absorbed by the layer coming into physical contact with the body and channeled in the direction of the retaining element. A distribution effect within the layer is also desirable. Furthermore, reverse wetting of the composite material, specifically with the exertion of pressure such as can be caused by the body weight of a user when sitting, should be as low as possible. The composite material should perform a bracing function between the absorbent retaining element of a hygiene article and the skin surface.
- [0004] The surface which is in physical contact with the skin of the user should be experienced as soft and pleasant, which can be achieved by the use of

[0005] US 5,257,982 describes a composite material for producing a layer that comes into physical contact with the body in an absorptive hygiene article which is formed from at least two non-woven material layers, where each non-woven material layer has a primary layer which comes into physical contact with the body and a second layer positioned under it, which therefore does not come into physical contact with the body. The fiber thickness of the second layer positioned not to come into physical contact with the body is less than the fiber thickness of the first layer positioned so that it comes into physical contact with the body. The publication teaches positioning layers of greater fiber thickness in physical contact with the body and layers of lesser thickness not in physical contact with the body. In the case of several layers, the layers are arranged in order of progressively decreasing fiber thickness. The layers can comprise thermoplastic fibers of polyamides, polyolefins or polypropylenes, fibers of low-melting polyester are also mentioned.

[0007] From EP-A-0 859 883 B1 a plurality of composite materials is known with at least two layers of non-woven material, which can also be used to produce a layer for a hygienic article that comes into physical contact with the body. This publication is concerned with improving the fluid absorption and distribution characteristics of the composite material as the top sheet in a hygienic article, specifically transfer times and reverse wetting characteristics are to be improved. Two- or three-layer composite materials in highly varied combinations of layers are disclosed, as part of which mixtures of synthetic bonding fibers and matrix-forming fibers are utilized.

[0008] The object of the present invention is to further improve a composite material of the type described above, taking into consideration the previously described general requirements for a top sheet material, with respect to the strength of the fiber composite, namely, between the fibers of a non-woven layer but also between at least two non-woven layers, and with respect to the tendency of the composite material to give off particulates (fibers or parts of fibers) into the environment when it is handled (powdering). It was ascertained that composite materials on a non-woven base create very high levels of dust when they are handled and especially when handled in high-speed manufacturing and processing machinery, e.g., those for the production of absorbent hygienic articles. The present invention is intended to counteract this additional problem and thereby improve the processing properties of composite materials from non-woven layers. Furthermore, any migration to the outside of the frequently granular superabsorbent polymer materials from the retaining element through the layer coming into physical contact with the body is to be prevented.

[0009] This object is accomplished by a composite material of at least two non-woven layers joined by a thermal process, wherein the upper layer in physical contact with the body is formed from a mixture of mono-component fibers and bi-component fibers and the proportion of bi-component fibers amounts to 30 to 70 % by weight of the upper layer, and where the denier of the fibers in the upper layer is at most 3.5 dtex, and where the lower layer comprises at least 40 % by weight bi-component fibers, whose higher melting component is made of PET (polyester) and whose lower melting component has a lower melting point than that of the mono-component fibers of the upper layer, and where the denier of the bi-component fibers of the lower layer is between 4 and 10 dtex.

[0010] The bi-component fibers, whose lower melting component forms a binding agent through a thermal process, result in an improvement in internal strength, i.e., the cohesion of the fibers one to the other but also of the fibers between the layers. As the result of incorporating higher melting, extremely fine, and therefore, extremely thin mono-component fibers in the upper layer in physical

contact with the body, in addition to bi-component fibers, the upper layer is felt to be soft and pleasant. A percentage of from 30 to 70 % by weight for the bi-component fibers has proven to be conducive to reaching the objective. If too few fine mono-component fibers are used in the upper layer which remain untouched by the thermal process, the layer would be experienced as being too hard. If too few bi-component fibers are used which result in the fibers being linked through the thermal process, the bond within the layer is inadequate. By selecting the denier of the fibers in the upper layer at a maximum of 3.5 dtex, not only the aspect of a pleasant sensation when worn is satisfied, but an additional problem is solved very effectively. Migration of granular superabsorbent particulate material to the surface of the hygienic article is hereby prevented. Consequently, additional protective layers in the form of thin paper-like layers or the like for the retaining element containing superabsorbent materials can be dispensed with.

[0011] With the invention it was recognized that the dust problem mentioned above has its basis in conflicting goals. In the fiber composite the one minimum lower layer is primarily supposed to provide adequate capacitative volume to ensure rapid absorption of fluid and to function as a spacer between the (wet) retentive absorptive element and the inside of the diaper. This is achieved on the one hand by the use of relatively stiff, resilient fibers, and, on the other hand, by the fact that the lower layer undergoes no or only very minor compression during the thermal bonding. The result of these circumstances is that during the thermal bonding relatively few fibers come into contact with each other. The dust problem results from this during the further processing of the composite material. Inadequately bonded fibers and fiber parts have a tendency to detach themselves from the fiber composite.

[0012] By selecting a special bi-component fiber with PET (polyester) (or with a polymer equivalent to PET with respect to the resiliency characteristics of such bi-component fibers) as a higher-melting component in a proportion of at least 40% with a simultaneous selection of a fiber thickness between 4 and 10 dtex, both adequate rigidity or resiliency of the composite material as well as outstanding bonding of the fibers to each other is achieved.



- [0013] The PET core of these bi-component fibers provides adequate fiber stiffness and consequently the necessary resiliency and maintenance of a large capacitative volume. If too few bi-component fibers with PET (polyester) as higher melting component are used, the lower layer either has too little resiliency (in the event that another bi-component fiber is used, for example, PP/PE (polypropylene, polyethylene) bi-component fibers), or the fibers in the lower layer are not adequately bonded to each other following thermofusion (in the event that a resilient mono-component fiber is used as an additional fiber component). The latter configuration would promote the dust problem described above during further processing of the composite material.
- [0014] EP-A-0 859 883 B1 mentioned above, does mention a plurality of combinations for the individual layers of the non-woven composite material. Only a few embodiments include bi-component fibers with PET (polyester) as the higher melting component. The combinations of layers however diverge in many other parameters from the combination claimed here. The advantageousness of bi-component fibers of this type in the combination of layers claimed was neither recognized nor suggested.
- [0015] In an advantageous further development of the invention the upper layer in physical contact with the body has a textured pattern created by calendering, where the percentage of the textured pattern covers 5 to 30 %, preferably 15 to 25 % of the total area of the composite material. Calendering further increases the strength within the composite material. Impermeability with respect to an involuntary escape of superabsorbent particulate materials, which must therefore be prevented, is also improved.
- [0016] It has furthermore proved to be advantageous if the upper layer is configured with a surface weight of 10 to 30, preferably of 15 to 20 g/m<sup>2</sup>. The rate of fluid absorption is adequate with this surface weight and the layer can still be produced economically.
- [0017] The rate of fluid absorption is positively influenced even more by making the fibers of the upper layer hydrophilic.

[0021] The further object of the present invention is to improve a hygienic article having a fluid-tight layer not in physical contact with the body in use, a retaining element and a fluid-permeable layer provided on the side of the retaining element in physical contact with the body, both with respect to fluid absorption and distribution properties and low reverse wetting characteristics as well with respect to the dust problem mentioned above and also the barrier effect of the layer not in physical contact with the body to prevent superabsorbent particulate materials from escaping to the surface of the hygienic article.

[0022] This object is accomplished by a hygienic article, wherein the retaining element comprises a layer of intralinked cellulose fibers with a fluid retention value between 0.6 and 0.9  $g_{Fl}/g_{Fiber}$ , where the layer of intralinked cellulose fibers contains 8 - 15 % by weight of superabsorbent polymer materials, where the fluid-permeable layer provided on the side of the retaining element in physical contact with the body for its part is at least two layers and the upper of these layers consists of fibers with a denier of at most 3.5 dtex, while the lower of these layers comprises bi-component fibers with a denier between 4 and 10 dtex, whose higher melting component is made of PET.

[0023] The fluid retention capability of the linked and non-linked natural cellulose fibers is determined by the following centrifuge test giving the previously mentioned fluid retention value. A layer of cellulose fibers to be analyzed is weighed in a dry state to determine its mass in grams. The samples are then immersed completely for 30 minutes in a one-percent sodium chloride solution of demineralized water as the test solution and then centrifuged for 4 minutes at 276 times the speed of gravitational acceleration. Then the specimens are weighed again to determine the mass, including the bound fluid. The mass of the fluid absorbed or bound is found from the difference between the mass determined after centrifuging and the dry mass of the fiber material to be analyzed. If this difference is divided by the dry mass a retention value is obtained in  $g_{Fl}/g_{Fiber}$ .

[0024] As the result of the retaining element having a layer of intralinked cellulose fibers with 8 to 15 % by weight of this layer comprising superabsorbent polymer materials, one effect is to prevent the retaining element from collapsing when impacted by fluid, since intralinked cellulose fibers expand when impacted by fluid rather than collapsing in on themselves, which is generally known and utilized in modern hygienic articles. The second effect is that fluid remaining in the retaining element is bound there as the result of the inventive high percentage of superabsorbent polymer materials in this layer of the retaining element preferably in physical contact with the body. The reverse wetting characteristics of the retaining element and consequently of the hygienic article are markedly improved, since even under exertion of pressure, such as the body weight of a user of the hygienic article,

[0025] By further developing the fluid-permeable layer, provided as at least two layers on the side of the retaining element in physical contact with the body, that is the top sheet of the hygienic article, so that the upper of these layers consists of fibers with a denier of 3.5 dtex at most, while the lower of these layers comprises bi-component fibers with a denier between 4 and 10 dtex, whose higher melting component is formed of PET (polyester), one effect - as discussed at the beginning in connection with the composite material under the invention - is to convey a pleasant feeling during use because of the extremely fine fibers in the layer in physical contact with the skin, and the other effect is that good fiber cohesion is achieved, with good resiliency characteristics in the lower layer and absolute impermeability to the escape of superabsorbent particulate materials.

[0026] In this aspect of the invention the retaining element has in addition a layer of non-linked cellulose fibers with a fluid retention value between 1.0 and 1.4  $g_{Fl}/g_{Fiber}$  and at least 20 % by weight, preferably at least 40 % by weight superabsorbent polymer materials. This layer is located below the layer of the retaining element formed from intralinked cellulose fibers, thus not in physical contact with the body.

[0027] Furthermore it has proven to be advantageous if the previously mentioned additional layer of the retaining element is constructed in two layers, by the additional layer having a layer essentially free of superabsorbent materials on the side not in physical contact with the body in use. This essentially SAP-free layer, which has at most 20 % by weight, preferably at most 10 % by weight of superabsorbent materials, functions almost as a blocker for granular superabsorbent particulate materials which are contained in very much higher concentration in the aforementioned retaining layer of the retaining element, towards the side not in physical contact with the body, where there is a risk that these occasionally sharp granules can damage the fluid-impermeable layer not in physical contact with the body (the back sheet).

[0028] Additional features, details and advantages of the invention can be found in the attached patent claims and the drawing and following description of preferred embodiments of the invention.

[0029] Figure 1 shows a schematic cross-section view of a dual-layer composite material under the invention;

[0031] Figure 2 shows a schematic cross-section view of a hygienic article under the invention.

[0032] Figure 1 shows in a schematic representation a composite material under the invention which can be used as a layer in physical contact with the body in a hygienic article. The composite material 2 comprises a first upper layer 4 of the hygienic article in physical contact with the body in use and a second lower layer 6 of the hygienic article not in physical contact with the body in use. The upper layer 4, which has a surface weight of 18 g/m<sup>2</sup>, is formed of a carded non-woven material from a fiber mixture which is composed 60 % by weight of polypropylene mono-component fibers with a denier of 2.2 dtex and 40 % by weight of polypropylene/polyethylene bi-component fibers with a denier of 1.7 dtex. This layer was calendered, during which process a so-called “checkerboard textured pattern” was created, which has line sections 8 alternately offset to each other and aligned to each other in vertical directions as shown in Figure 1a. The percentage of textured line sections 8 over the entire surface is about 20 percent.

[0033] The melting point of the PP mono-component fibers at about 160°C is higher than that of the lower melting component PE of the PP/PE bi-component fibers at 110°C. The melting point of the higher melting PP component of the PP/PE bi-component fibers is about 140°C.

[0034] The lower layer 6, which has a surface weight of 12 g/m<sup>2</sup>, comprises a high percentage of PET/PE bi-component fibers, which percentage was selected in the case of the preferred embodiment at 100 %. The bi-component fibers have a

fineness or thickness of 4.4 dtex. The melting point of the higher melting component PET (polyester) of the PET/PE bi-component fibers lies at about 260°C. The bi-component fiber is configured as sheath/core fiber with core of PET symmetrical to the longitudinal center direction of the fiber.

- [0035] A bi-component fiber with a thickness of 6.7 dtex proves to be particularly suitable, preferably formed as sheath/core fiber with asymmetrical core (higher resiliency).
- [0036] The lower layer 6 was configured as carded non-woven material. The previously calendered upper layer 4 and the lower layer 6 are positioned on top of one another and bonded together in an "air through process" by the thermal effect of hot air, in which the lower melting component of the bi-component fibers (PE in each case) is at least softened by the thermal effect and thus bonds the fibers of the individual layers to each other, but also bonds the fibers in an interface boundary area between the two non-woven material layers.
- [0037] Figure 2 shows in a schematic view a preferred embodiment of a hygienic article 10 of the invention with fluid-impermeable plastic layer 12 not in physical contact with the body, a triple-layer absorbent element 14 and a top sheet layer 16, which for its part is configured at least double-layered, covering the absorptive element on the side in physical contact with the body. In addition, the hygienic article includes on both sides of the absorptive element rib elements 20 furnished with means of elastification 18, which overlap the top sheet 16 towards the sides visible in the drawing and run flush to the edge as far as a longitudinal edge 22 of the plastic layer 12.
- [0038] The retaining element 14 comprises a layer 24 furnished immediately below the top sheet layer 16 and in contact with it, which consists of linked cellulose fibers with a percentage of from 8 to 15 % by weight with respect to the weight of this layer of superabsorbent materials. Below this first layer 24 is a second retaining element layer 26, which essentially consists of non-linked cellulose fibers with a percentage of more than 20 % by weight of superabsorbent materials. A third layer 28 not in physical contact with the body, which can also be a partial layer of the second layer 26 and which likewise consists of natural non-linked cellulose fibers, but which

has no superabsorbent materials, follows this layer 26. This partial layer acts primarily as a barrier layer for granular superabsorbent particulate materials and prevents them from dropping further down towards the plastic layer 12 and damaging it.

[0039] The top sheet layer 16 in physical contact with the body is, as already mentioned, configured in two layers, where the upper layer coming into direct physical contact with the body of a user of the hygienic article consists of fibers with a maximum denier of 3.5 dtex, while the lower of these layers includes bi-component fibers with a denier between 4 and 10 dtex, whose higher melting component is made of PET (polyester). This top sheet layer 16 is preferably configured like the composite material from Figure 1.

1. Composite material for producing a layer of a disposable absorbent hygienic article that comes into physical contact with the body, made of at least two non-woven material layers (4, 6) joined by thermal processing, where the upper layer (4) in physical contact with the body is formed of a mixture of mono-component fibers and bi-component fibers and the percentage of bi-component fibers amounts to 30 - 70 % by weight of the upper layer, and where the denier of the fibers of the upper layer is 3.5 dtex at the most, and where the lower layer (6) comprises at least 40 % by weight bi-component fibers whose higher melting component is made of PET (polyester) and whose lower melting component has a lower melting point than that of the mono-component fibers of the upper layer, and where the denier of the bi-component fibers of the lower layer is between 4 and 10 dtex.

2. Composite material in accordance with claim 1, characterized in that the upper layer in physical contact with the body (4) has a textured pattern created by calendering, where the percentage of the textured surface comprises 5 to 30 % of the total surface.

3. Composite material in accordance with claim 2, wherein the percentage of the textured surface comprises 15 to 25 % of the total surface.

4. Composite material in accordance with one of the preceding claims, wherein the surface weight of the upper layer (4) comes to 10 to 30 g/m<sup>2</sup>.

5. Composite material in accordance with claim 4, wherein the surface weight of the upper layer (4) comes to 15 to 20 g/m<sup>2</sup>.

6. Composite material in accordance with one of the preceding claims, wherein the fibers of the upper layer (4) are hydrophilic or are made supple to be permanently hydrophilic.



7. Composite material in accordance with one of the preceding claims, wherein the lower layer (6) comprises at least 60 % by weight bi-component fibers whose higher melting component is made of PET (polyester).

8. Composite material in accordance with claim 7, wherein the lower layer (6) comprises at least 80 % by weight bi-component fibers whose higher melting component is made of (PET) polyester.

9. Composite material in accordance with claim 8, wherein the lower layer (6) consists 100 % of bi-component fibers whose higher melting component is made of PET (polyester).

10. Composite material in accordance with one of the preceding claims, wherein the bi-component fibers of the lower layer (6) with PET (polyester) as higher melting component is a sheath/core fiber.

11. Composite material in accordance with claim 10, wherein the sheath/core fiber has a core positioned eccentrically to the longitudinal center direction of the fiber.

12. Composite material in accordance with claim 11, wherein the denier of the sheath/core fiber is 5 to 8 dtex.

13. Composite material in accordance with claim 12, wherein the denier of the sheath/core fiber is 6 to 7 dtex.

14. Composite material in accordance with one of the preceding claims, wherein the lower melting component of the bi-component fiber present at least 40 % by weight in the lower layer is made of PE (polyethylene).

15. Absorbent hygienic article with a fluid-tight layer (12) not in physical contact with the body during use, a retaining element (14) and a fluid-permeable layer (16) furnished on the side of the retaining element (14) in physical contact with the body, wherein the layer (16) furnished on the fluid-permeable side of the retaining element (14) in physical contact with the body comprises a composite material in accordance with one or more of the preceding claims or is made of such a composite material.


16. Absorbent hygienic article having a fluid-tight layer (12) not in physical contact with the body during use, a retaining element (14) and a fluid-permeable layer (16) provided on the side of the retaining element in physical contact with the body, where the retaining element (14) comprises one layer (24) of intralinked cellulose fibers with a fluid retention value between 0.6 and 0.9  $\text{g}_{\text{FI}}/\text{g}_{\text{Fiber}}$ , wherein the layer (24) of intralinked cellulose fibers contains 8 - 15 % by weight of superabsorbent polymer materials, where the fluid-permeable layer (16) provided on the side of the retaining element (14) in physical contact with the body for its part is at least double-layered and the upper of these layers consists of fibers with a maximum denier of 3.5 dtex, while the lower of these layers comprises bi-component fibers with a denier between 4 and 10 dtex whose higher melting component is made of PET.

17. Hygienic article in accordance with claim 16, wherein the retaining element (14) has in addition a layer (26) of non-meshed cellulose fibers with a fluid retention value between 1.0 and 1.4  $\text{g}_{\text{FI}}/\text{g}_{\text{Fiber}}$  and at least 20 % by weight of superabsorbent polymer materials.


18. Hygienic article in accordance with claim 17, wherein the additional layer (26) of the retaining element is disposed below the layer (24) of intralinked cellulose fibers.

19. Hygienic article in accordance with claim 18, wherein the additional layer (26) has a layer-like area (28) free of superabsorbent materials on the side not in physical contact with the body in use .


20. Hygienic article in accordance with one of the claims 16 to 19, wherein the fluid-permeable layer (16) furnished on the side of the retaining element in contact with the body is configured in accordance with one or more of the claims 1 to 14.

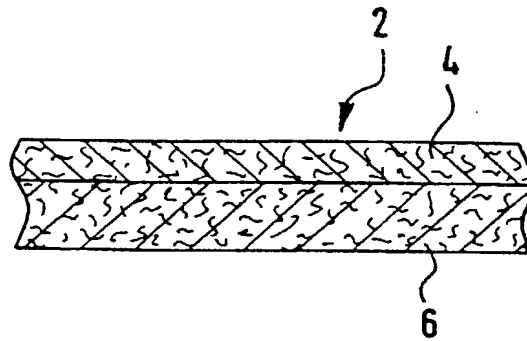

**Fig. 1**



**Fig. 1a**

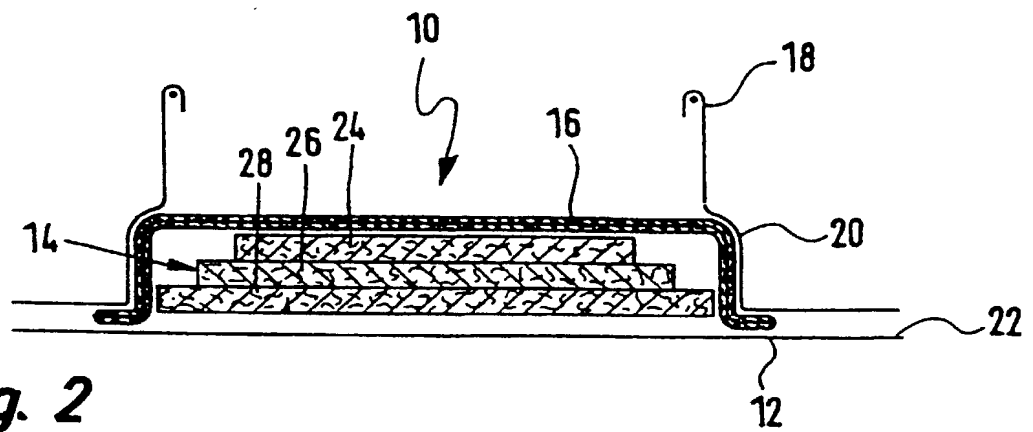

**Fig. 2**

1/pst

1

Title: Composite Material for Producing a Layer of a Hygienic Article That Comes into Physical Contact with The Body and a Corresponding Hygienic Article

#### Description

The invention relates to a composite material for producing a layer of a disposable hygiene article that comes into physical contact with the body from at least two non-woven material layers joined by a thermal process.

Multiple-layer composite materials of this type, as well as hygienic articles with a layer consisting of such a composite material that comes into physical contact with the body, usually described as the top sheet, are known. The layer coming into physical contact with the body usually covers a retaining element located under it, which thus does not come into physical contact with the body, in which the bodily fluid discharged by the user is to be retained, which in the case of modern hygienic articles is primarily achieved by means of superabsorbent materials inside the retaining element.

Severe demands are made on composite materials of the type under discussion with respect to rapid fluid absorption capability even with repeated sudden saturation. Impinging fluid must be prevented from collecting on the surface (pooling) and escaping towards the sides, instead the impinging fluid should be absorbed by the layer coming into physical contact with the body and channeled in the direction of the retaining element. A distribution effect within the layer is also desirable. Furthermore, reverse wetting of the composite material, specifically with the exertion of pressure such as can be caused by the body weight of a user when sitting, should be as low as possible. The composite material should perform a bracing function between the absorbent retaining element of a hygiene article and the skin surface.

The surface which is in physical contact with the skin of the user should be experienced as soft and pleasant, which can be achieved by the use of extremely fine fibers. The use of extremely fine fibers on the other hand conflicts with the attempt to achieve the greatest possible resilience in the characteristics of the composite material. This is understood to mean the ability of the composite material

to bring a high springback force to bear against external compressive forces or at least to resume almost its original condition following saturation and/or compression.

US 5,257,982 describes a composite material for producing a layer that comes into physical contact with the body in an absorptive hygiene article which is formed from at least two non-woven material layers, where each non-woven material layer has a primary layer which comes into physical contact with the body and a second layer positioned under it, which therefore does not come into physical contact with the body. The fiber thickness of the second layer positioned not to come into physical contact with the body is less than the fiber thickness of the first layer positioned so that it comes into physical contact with the body. The publication teaches positioning layers of greater fiber thickness in physical contact with the body and layers of lesser thickness not in physical contact with the body. In the case of several layers, they are arranged in order of progressively decreasing fiber thickness. The layers can comprise thermoplastic fibers of polyamides, polyolefins or polypropylenes, fibers of low-melting polyester are also mentioned.

EP 0 372 572 A2 describes polyester binding fibers for thermally bonding non-woven fiber materials which have a relatively low melting point in the range between 160° and 220° Celsius. Additional recommendations cannot be derived from this publication.

From EP-A-0 859 883 B1 a plurality of composite materials is known with at least two layers of non-woven material, which can also be used to produce a layer for a hygienic article that comes into physical contact with the body. This publication is concerned with improving the fluid absorption and distribution characteristics of the composite material as the top sheet in a hygienic article, specifically transfer times and reverse wetting characteristics are to be improved. Two- or three-layer composite materials in highly varied combinations of layers are disclosed, as part of which mixtures of synthetic bonding fibers and matrix-forming fibers are utilized.

The object of the present invention is to further improve a composite material of the type named at the beginning, taking into consideration the previously named general requirements for a top sheet material, with respect to the strength of

the fiber composite, namely between the fibers of a non-woven layer but also between at least two non-woven layers, and with respect to the tendency of the composite material to give off particulates (fibers or parts of fibers) into the environment when it is handled (powdering). It was ascertained that composite materials on a non-woven base create very high levels of dust when they are handled and especially when handled in high-speed manufacturing and processing machinery, e.g. those for the production of absorbent hygienic articles. The present invention is intended to counteract this additional problem and thereby improve the processing properties of composite materials from non-woven layers. Furthermore, any migration to the outside of the frequently granular superabsorbent polymer materials from the retaining element through the layer coming into physical contact with the body is to be prevented.

This object is accomplished by a composite material of at least two non-woven layers joined by a thermal process, wherein the upper layer in physical contact with the body is formed from a mixture of mono-component fibers and bi-component fibers and the proportion of bi-component fibers amounts to 30 to 70 % by weight of the upper layer, and where the denier of the fibers in the upper layer is at most 3.5 dtex, and where the lower layer comprises at least 40 % by weight bi-component fibers, whose higher melting component is made of PET (polyester) and whose lower melting component has a lower melting point than that of the mono-component fibers of the upper layer, and where the denier of the bi-component fibers of the lower layer is between 4 and 10 dtex.

The bi-component fibers, whose lower melting component forms a binding agent through a thermal process, result in an improvement in internal strength, i.e. the cohesion of the fibers one to the other but also of the fibers between the layers. As the result of incorporating higher melting, extremely fine, therefore extremely thin mono-component fibers in the upper layer in physical contact with the body, in addition to bi-component fibers, the upper layer is felt to be soft and pleasant. A percentage of from 30 to 70 % by weight for the bi-component fibers has proven to be conducive to reaching the objective. If too few fine mono-component fibers are used in the upper layer which remain untouched by the thermal process, the

The PET core of these bi-component fibers provides adequate fiber stiffness and consequently the necessary resiliency and maintenance of a large capacitative volume. If too few bi-component fibers with PET (polyester) as higher melting component are used, the lower layer either has too little resiliency (in the event that another bi-component fiber is used, for example, PP/PE (polypropylene,



polyethylene) bi-component fibers), or the fibers in the lower layer are not adequately bonded to each other following thermofusion (in the event that a resilient mono-component fiber is used as an additional fiber component). The latter configuration would promote the dust problem described above during further processing of the composite material.

EP-A-0 859 883 B1 mentioned at the beginning does mention a plurality of combinations for the individual layers of the non-woven composite material. Only a few embodiments include bi-component fibers with PET (polyester) as the higher melting component. The combinations of layers however diverge in many other parameters from the combination claimed here. The advantageousness of bi-component fibers of this type in the combination of layers claimed was neither recognized nor suggested.

In an advantageous further development of the invention the upper layer in physical contact with the body has an textured pattern created by calendering, where the percentage of the textured pattern covers 5 to 30 %, preferably 15 to 25 % of the total area of the composite material. Calendering further increases the strength within the composite material. Impermeability with respect to an involuntary escape of superabsorbent particulate materials, which must therefore be prevented, is also improved.

It has furthermore proved to be advantageous if the upper layer is configured with a surface weight of 10 to 30, preferably of 15 to 20 g/m<sup>2</sup>. The rate of fluid absorption is adequate with this surface weight and the layer can still be produced economically.

The rate of fluid absorption is positively influenced even more by making the fibers of the upper layer hydrophilic.

In a further development of the invention the lower layer comprises at least 60 % by weight, preferably at least 80 % by weight, bi-component fibers, whose higher melting component is composed of PET (polyester). In an especially preferable form, the lower layer consists 100 % of such bi-component fibers. The higher the percentage of these bi-component fibers as selected under the invention in the lower layer of the non-woven composite material, the more resilient the

composite material proves to be, while at the same time exhibiting a higher potential for inter-fiber bonding.

Bi-component fibers can be produced in a known way as side-by-side fiber, as sheath/core or also as matrix fibers with an inlaid filament-like lower melting component. The bi-component fibers with PET (polyester) as higher melting component is preferably configured as a sheath/core fiber with a core located eccentrically to the longitudinal central direction of the fiber. The thickness of the sheath/core bi-component fibers in a further development of the invention is 5 to 8 dtex and in accordance with a particularly preferred embodiment 6 to 7 dtex.

In accordance with a further advantageous embodiment of the invention the lower melting component of the bi-component fiber present at least 40 percent by weight in the lower layer is formed of PE (polyethylene). The specific combination of PET as higher melting component and PE as lower melting component has proven to be advantageous, since in such a case the weldability with other components of absorbent hygienic articles, for example the back sheet normally made of PP or PE, is made easier.

The further object of the present invention is to improve a hygienic article having a fluid-tight layer not in physical contact with the body in use, a retaining element and a fluid-permeable layer provided on the side of the retaining element in physical contact with the body, both with respect to fluid absorption and distribution properties and low reverse wetting characteristics as well with respect to the dust problem mentioned at the beginning and also the barrier effect of the layer not in physical contact with the body to prevent superabsorbent particulate materials from escaping to the surface of the hygienic article.

This object is accomplished by a hygienic article, wherein the retaining element comprises a layer of intralinked cellulose fibers with a fluid retention value between 0.6 and 0.9  $\frac{g_{FI}}{g_{Fiber}}$ , where the layer of intralinked cellulose fibers contains 8 - 15 % by weight of superabsorbent polymer materials, where the fluid-permeable layer provided on the side of the retaining element in physical contact with the body for its part is at least two layers and the upper of these layers consists of fibers with a denier of at most 3.5 dtex, while the lower of these layers

comprises bi-component fibers with a denier between 4 and 10 dtex, whose higher melting component is made of PET.

The fluid retention capability of the linked and non-linked natural cellulose fibers is determined by the following centrifuge test giving the previously mentioned fluid retention value. A layer of cellulose fibers to be analyzed is weighed in a dry state to determine its mass in grams. The samples are then immersed completely for 30 minutes in a one-percent sodium chloride solution of demineralized water as the test solution and then centrifuged for 4 minutes at 276 times the speed of gravitational acceleration. Then the specimens are weighed again to determine the mass, including the bound fluid. The mass of the fluid absorbed or bound is found from the difference between the mass determined after centrifuging and the dry mass of the fiber material to be analyzed. If this difference is divided by the dry mass a retention value is obtained in  $g_{fl}/g_{Fiber}$ .

As the result of the retaining element having a layer of intralinked cellulose fibers with 8 to 15 % by weight of this layer comprising superabsorbent polymer materials, one effect is to prevent the retaining element from collapsing when impacted by fluid, since intralinked cellulose fibers expand when impacted by fluid rather than collapsing in on themselves, which is generally known and utilized in modern hygienic articles. The second effect is that fluid remaining in the retaining element is bound there as the result of the inventive high percentage of superabsorbent polymer materials in this layer of the retaining element preferably in physical contact with the body. The reverse wetting characteristics of the retaining element and consequently of the hygienic article are markedly improved, since even under exertion of pressure, such as the body weight of a user of the hygienic article, any still remaining fluid still present in this layer cannot reach the user's skin surface since it is adequately bonded by the superabsorbent materials in this layer.

By further developing the fluid-permeable layer, provided as at least two layers on the side of the retaining element in physical contact with the body, that is the top sheet of the hygienic article, so that the upper of these layers consists of fibers with a denier of 3.5 dtex at most, while the lower of these layers comprises bi-component fibers with a denier between 4 and 10 dtex, whose higher melting

component is formed of PET (polyester), one effect - as discussed at the beginning in connection with the composite material under the invention - is to convey a pleasant feeling during use because of the extremely fine fibers in the layer in physical contact with the skin, and the other effect is that good fiber cohesion is achieved, with good resiliency characteristics in the lower layer and absolute impermeability to the escape of superabsorbent particulate materials.

In this embodiment of the invention the retaining element has in addition a layer of non-linked cellulose fibers with a fluid retention value between 1.0 and 1.4  $\text{g}_{\text{Fl}}/\text{g}_{\text{Fiber}}$  and at least 20 % by weight, preferably at least 40 % by weight superabsorbent polymer materials. This layer is located below the layer of the retaining element formed from intralinked cellulose fibers, thus not in physical contact with the body.

Furthermore it has proven to be advantageous if the previously mentioned additional layer of the retaining element is constructed in two layers, by said layer having a layer essentially free of superabsorbent materials on the side not in physical contact with the body in use. This essentially SAP-free layer, which has at most 20 % by weight, preferably at most 10 % by weight of superabsorbent materials, functions almost as a blocker for granular superabsorbent particulate materials which are contained in very much higher concentration in the aforementioned retaining layer of the retaining element, towards the side not in physical contact with the body, where there is a risk that these occasionally sharp granules can damage the fluid-impermeable layer not in physical contact with the body (the back sheet).

Additional features, details and advantages of the invention can be found in the attached patent claims and the drawing and following description of preferred embodiments of the invention.

In the drawing:

Figure 1 shows a schematic cross-section view of a dual-layer composite material under the invention;

Figure 1a shows a textured pattern from the composite material;

Figure 2 shows a schematic cross-section view of a hygienic article under the invention.

Figure 1 shows in a schematic representation a composite material under the invention which can be used as a layer in physical contact with the body in a hygienic article. The composite material 2 comprises a first upper layer 4 of the hygienic article in physical contact with the body in use and a second lower layer 6 of the hygienic article not in physical contact with the body in use. The upper layer 4, which has a surface weight of  $18 \text{ g/m}^2$ , is formed of a carded non-woven material from a fiber mixture which is composed 60 % by weight of polypropylene mono-component fibers with a denier of 2.2 dtex and 40 % by weight of polypropylene/polyethylene bi-component fibers with a denier of 1.7 dtex. This layer was calendered, during which process a so-called “checkerboard textured pattern” was created, which has line sections 8 alternately offset to each other and aligned to each other in vertical directions. The percentage of textured line sections 8 over the entire surface is about 20 percent.

The melting point of the PP mono-component fibers at about  $160^\circ\text{C}$  is higher than that of the lower melting component PE of the PP/PE bi-component fibers at  $110^\circ\text{C}$ . The melting point of the higher melting PP component of the PP/PE bi-component fibers is about  $140^\circ\text{C}$ .

The lower layer 6, which has a surface weight of  $12 \text{ g/m}^2$ , comprises a high percentage of PET/PE bi-component fibers, which percentage was selected in the case of the preferred embodiment at 100 %. The bi-component fibers have a fineness or thickness of 4.4 dtex. The melting point of the higher melting component PET (polyester) of the PET/PE bi-component fibers lies at about  $260^\circ\text{C}$ . The bi-component fiber is configured as sheath/core fiber with core of PET symmetrical to the longitudinal center direction of the fiber.

A bi-component fiber with a thickness of 6.7 dtex proves to be particularly suitable, preferably formed as sheath/core fiber with asymmetrical core (higher resiliency).

The lower layer 6 was configured as carded non-woven material. The previously calendered upper layer 4 and the lower layer 6 are positioned on top of


one another and bonded together in an “air through process” by the thermal effect of hot air, in which the lower melting component of the bi-component fibers (PE in each case) is at least softened by the thermal effect and thus bonds the fibers of the individual layers to each other, but also bonds the fibers in an interface boundary area between the two non-woven material layers.

Figure 2 shows in a schematic view a preferred embodiment of a hygienic article 10 under the invention with fluid-impermeable plastic layer 12 not in physical contact with the body, a triple-layer absorbent element 14 and a top sheet layer 16, which for its part is configured at least double-layered, covering the absorptive element on the side in physical contact with the body. In addition, the hygienic article includes on both sides of the absorptive element rib elements 20 furnished with means of elastification 18, which overlap the top sheet towards the sides visible in the drawing and run flush to the edge as far as a longitudinal edge 22 of the plastic layer 12.


The retaining element 14 comprises a layer 24 furnished immediately below the top sheet layer 16 and in contact with it, which consists of linked cellulose fibers with a percentage of from 8 to 15 % by weight with respect to the weight of this layer of superabsorbent materials. Below this first layer 24 is a second retaining element layer 26, which essentially consists of non-linked cellulose fibers with a percentage of more than 20 % by weight of superabsorbent materials. A third layer 28 not in physical contact with the body, which can also be a partial layer of the second layer 26 and which likewise consists of natural non-linked cellulose fibers, but which has no superabsorbent materials, follows this layer 26. This partial layer acts primarily as a barrier layer for granular superabsorbent particulate materials and prevents them from dropping further down towards the plastic layer 12 and damaging it.

The top sheet layer 16 in physical contact with the body is, as already mentioned, configured in two layers, where the upper layer coming into direct physical contact with the body of a user of the hygienic article consists of fibers with a maximum denier of 3.5 dtex, while the lower of these layers includes bi-component fibers with a denier between 4 and 10 dtex, whose higher melting component is made


of PET (polyester). This top sheet layer 16 is preferably configured like the composite material from Figure 1.

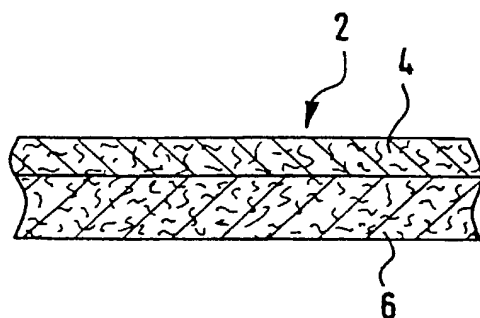

**Fig. 1**



**Fig. 1a**

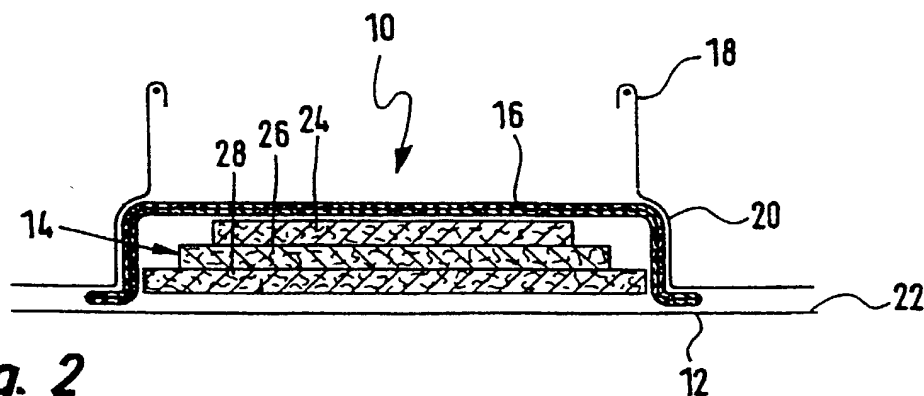

**Fig. 2**



What Is Claimed Is:

1. Composite material for producing a layer of a disposable absorbent hygienic article that comes into physical contact with the body, made of at least two non-woven material layers (4, 6) joined by thermal processing, where the upper layer (4) in physical contact with the body is formed of a mixture of mono-component fibers and bi-component fibers and the percentage of bi-component fibers amounts to 30 - 70 % by weight of the upper layer, and where the denier of the fibers of the upper layer is 3.5 dtex at the most, and where the lower layer (6) comprises at least 40 % by weight bi-component fibers whose higher melting component is made of PET (polyester) and whose lower melting component has a lower melting point than that of the mono-component fibers of the upper layer, and where the denier of the bi-component fibers of the lower layer is between 4 and 10 dtex.

2. Composite material in accordance with claim 1, characterized in that the upper layer in physical contact with the body (4) has a textured pattern created by calendering, where the percentage of the textured surface comprises 5 to 30 % of the total surface.

3. Composite material in accordance with claim 2, wherein the percentage of the textured surface comprises 15 to 25 % of the total surface.

4. Composite material in accordance with one of the preceding claims, wherein the surface weight of the upper layer (4) comes to 10 to 30 g/m<sup>2</sup>.

5. Composite material in accordance with claim 4, wherein the surface weight of the upper layer (4) comes to 15 to 20 g/m<sup>2</sup>.

6. Composite material in accordance with one of the preceding claims, wherein the fibers of the upper layer (4) are hydrophilic or are made supple to be permanently hydrophilic.



15. Absorbent hygienic article with a fluid-tight layer (12) not in physical contact with the body during use, a retaining element (14) and a fluid-permeable layer (16) furnished on the side of the retaining element (14) in physical contact with the body, wherein the layer (16) furnished on the fluid-permeable side of the retaining element (14) in physical contact with the body comprises a composite material in accordance with one or more of the preceding claims or is made of such a composite material.

16. Absorbent hygienic article having a fluid-tight layer (12) not in physical contact with the body during use, a retaining element (14) and a fluid-permeable layer (16) provided on the side of the retaining element in physical contact with the body, where the retaining element (14) comprises one layer (24) of intralinked cellulose fibers with a fluid retention value between 0.6 and 0.9  $\text{g}_{\text{Fl}}/\text{g}_{\text{Fiber}}$ , wherein the layer (24) of intralinked cellulose fibers contains 8 - 15 % by weight of superabsorbent polymer materials, where the fluid-permeable layer (16) provided on the side of the retaining element (14) in physical contact with the body for its part is at least double-layered and the upper of these layers consists of fibers with a maximum denier of 3.5 dtex, while the lower of these layers comprises bi-component fibers with a denier between 4 and 10 dtex whose higher melting component is made of PET.

17. Hygienic article in accordance with claim 16, wherein the retaining element (14) has in addition a layer (26) of non-meshed cellulose fibers with a fluid retention value between 1.0 and 1.4  $\text{g}_{\text{Fl}}/\text{g}_{\text{Fiber}}$  and at least 20 % by weight of superabsorbent polymer materials.

18. Hygienic article in accordance with claim 17, wherein the additional layer (26) of the retaining element is disposed below the layer (24) of intralinked cellulose fibers.

19. Hygienic article in accordance with claim 18, wherein the additional layer (26) has a layer-like area (28) free of superabsorbent materials on the side not in physical contact with the body in use .

20. Hygienic article in accordance with one of the claims 16 to 19, wherein the fluid-permeable layer (16) furnished on the side of the retaining element in contact with the body is configured in accordance with one or more of the claims 1 to 14.

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES  
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG

(19) Weltorganisation für geistiges Eigentum  
Internationales Büro



(43) Internationales Veröffentlichungsdatum  
12. April 2001 (12.04.2001)

PCT

(10) Internationale Veröffentlichungsnummer  
WO 01/25523 A1

(51) Internationale Patentklassifikation<sup>7</sup>: D04H 13/00,  
1/42

(21) Internationales Aktenzeichen: PCT/EP00/09537

(22) Internationales Anmeldedatum:  
29. September 2000 (29.09.2000)

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch

(30) Angaben zur Priorität:  
199 47 582.2 2. Oktober 1999 (02.10.1999) DE

(71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme von  
US): PAUL HARTMANN AG [DE/DE]; Paul-Hartmann-  
Strasse 12, 89522 Heidenheim (DE).

(72) Erfinder; und

(75) Erfinder/Anmelder (nur für US): MANGOLD, Rainer

[DE/DE]; Hesseweg 11, 89542 Herbrechtingen (DE).  
MALOWANIEC, Krzysztof-Daniel [DE/DE]; Fla-  
menweg 42, 89522 Heidenheim (DE). ECKEL, Petra  
[DE/DE]; Böblinger Strasse 12, 89522 Heidenheim (DE).

(74) Anwalt: FRIZ, Oliver; Dreiss, Fuhlendorf, Steimle &  
Becker, Postfach 10 37 62, 70032 Stuttgart (DE).


(81) Bestimmungsstaaten (national): AE, AG, AL, AM, AT,  
AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU,  
CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM,  
HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK,  
LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,  
MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL,  
TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Bestimmungsstaaten (regional): ARIPO-Patent (GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), eura-  
sisches Patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
europäisches Patent (AT, BE, CH, CY, DE, DK, ES, FI,  
FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI-Patent

[Fortsetzung auf der nächsten Seite]

(54) Title: COMPOSITE MATERIAL FOR PRODUCING A LAYER OF A HYGIENIC ARTICLE THAT COMES INTO PHYS-  
ICAL CONTACT WITH THE BODY AND A CORRESPONDING HYGIENIC ARTICLE

(54) Bezeichnung: VERBUNDWERKSTOFF ZUR BILDUNG EINER KÖRPERZUGEWANDTEN LAGE BEI EINEM HYGIE-  
NEARTIKEL SOWIE HYGIENEARTIKEL

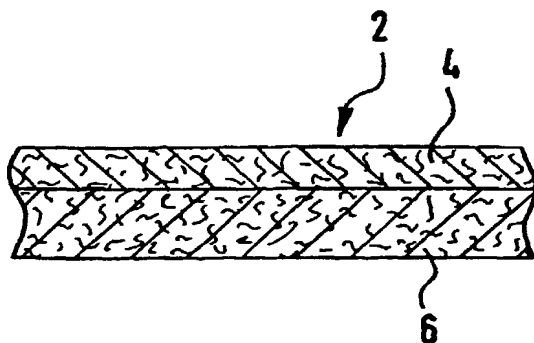


(57) Abstract: The invention relates to a composite material for pro-  
ducing a layer of a disposable absorbent hygienic article that comes  
into physical contact with the body, said layer consisting of at least  
two layers of a nonwoven material that are interlinked by a thermal  
process. The aim of the invention is to increase the processing prop-  
erties of the composite material and to prevent the escape of partic-  
ulate super-absorbent materials from the surface of the hygienic  
article. To this end, the top layer that comes into physical contact  
with the body consists of a mixture of mono-component fibers and  
bi-component fibers. The share of the bi-component fibers is 30 to  
70 % by weight and the denier value of the fibers of the top layer is  
not more than 3.5 dtex. The lower layer comprises at least 40 % by  
weight of bi-component fibers whose higher-melting component is  
constituted of PES (polyester) and the lower-melting component has  
a melting point lower than that of the mono-component fibers of the


top layer. The denier value of the bi-component fibers of the lower layer ranges between 4 and 10 dtex.

(57) Zusammenfassung: Die Erfindung betrifft einen Verbundwerkstoff zur Bildung einer körperzugewandten Lage bei einem  
absorbierenden Hygieneartikel zum einmaligen Gebrauch, aus wenigstens zwei durch thermische Einwirkung miteinander verbun-  
denen Vlieslagen; um die Verarbeitbarkeit des Verbundwerkstoffs zu erhöhen und des weiteren ein Austreten von partikelförmigen  
superabsorbierenden Materialien an die Oberfläche eines Hygieneartikels zu verhindern, ist die obere körperzugewandte Lage aus  
einer Mischung von Monokomponentenfasern und Bikomponentenfasern gebildet, wobei der Anteil der Bikomponentenfasern 30  
bis 70 Gew.-% beträgt und die Feinheit der Fasern der oberen Lage höchstens 3,5 dtex beträgt, die untere Lage umfasst zu wenigstens  
40 Gew.-% Bikomponentenfasern, deren höherschmelzende Komponente von PES (Polyester) gebildet und deren niedrigerschmel-  
zende Komponente einen niedrigeren Schmelzpunkt aufweist als der der Monokomponentenfasern der oberen Lage, und wobei die  
Feinheit der Bikomponentenfasern der unteren Lage zwischen 4 und 10 dtex liegt.


WO 01/25523 A1

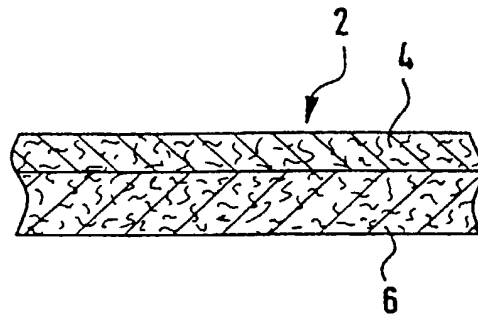

**Fig. 1**




**Fig. 1a**

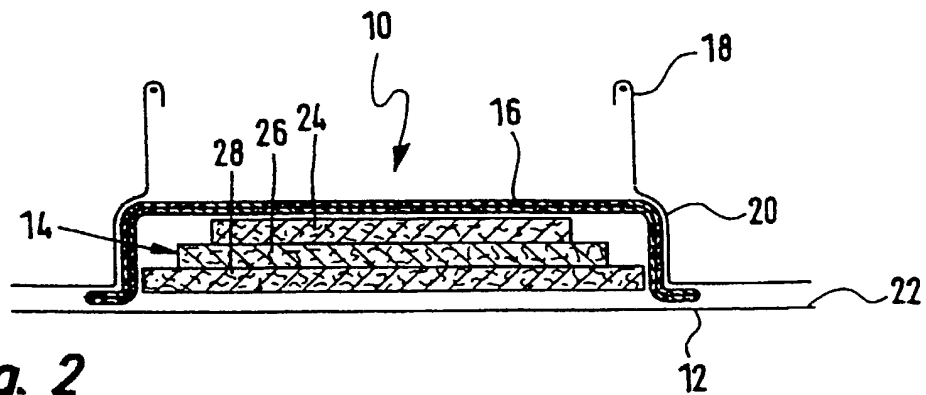

**Fig. 2**

1703 1152



1 1703 1152 1 1703 1152

Our Reference: DFS-146-A

**COMBINED DECLARATION AND POWER OF ATTORNEY**

**DECLARATION:**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**COMPOSITE MATERIAL FOR PRODUCING A LAYER OF A HYGIENIC ARTICLE THAT COMES INTO  
PHYSICAL CONTACT WITH THE BODY AND A CORRESPONDING HYGIENIC ARTICLE**

the specification of which (check only one item below):

☐ is attached hereto.

☐ was filed as United States application Serial No. \_\_\_\_\_ on \_\_\_\_\_, and was amended on or through \_\_\_\_\_ (if applicable).

☒ was filed as PCT international application Number PCT/EP00/09537 on 29 September 2000, and was amended under PCT Article 19 on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate or §365(a) of any PCT international application(s) which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT international application(s) having a filing date before that of the application on which priority is claimed:

Prior Foreign/PCT Application(s) and any Priority Claims Under 35 U.S.C. §119:			Priority Claimed	
<u>99 47 582.2</u>	<u>Germany</u>	<u>02 October 1999</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day/Mo/Yr Filed)	Yes	No
_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day/Mo/Yr Filed)	Yes	No

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below.

_____	_____
(Application Number)	(Filing Date)
_____	_____
(Application Number)	(Filing Date)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or §365(c) of any PCT international application(s) designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Prior U. S. Application(s) or PCT International Application(s) Designating the U.S. for Benefit Under 35 U.S.C. §120:

_____	_____	_____
(Application Number)	(Filing Date)	(Status: patented, pending, abandoned)
_____	_____	_____
(Application Number)	(Filing Date)	(Status: patented, pending, abandoned)

## POWER OF ATTORNEY:

3  
I hereby appoint the following attorney(s) and/or agent(s) Andrew R. Basile, Patent Office Registration No. 24753, William M. Hanlon, Jr., Patent Office Registration No. 28422, and Thomas D. Helmholdt, Patent Office Registration No. 33181, as my attorney(s) and/or agent(s), to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith.

Send all correspondence to: William M. Hanlon, Jr.  
Young & Basile, P.C.  
3001 West Big Beaver Road, Suite 624  
Troy, Michigan 48084  
Phone: (248) 649-3333

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1-00 Full name of sole or first inventor Rainer Mangold

Inventor's Signature R. Mangold

Date 28.3.02 Citizenship German

Residence Hesseweg 11, 89542 Herbrechtingen, Germany

DEX

Post Office Address Same as above.

2-00 Full name of second joint inventor, if any Krzysztof-Daniel Malowaniec

Inventor's Signature K. Malowaniec

Date 20.03.02 Citizenship German

Residence Flamenweg 42, 89522 Heidenheim, Germany

DEX

Post Office Address Same as above.

3-00 Full name of third joint inventor, if any Petra Eckel

Inventor's Signature P. Eckel

Date 14.03.02 Citizenship German

Residence Boblinger Strasse 12, 89522 Heidenheim, Germany

DEX

Post Office Address Same as above.